


CONTRACT

DATA SHEET

GENERAL DETAILS

Colour Code	xxxxxxx
Product Range	Contract
Oak Type	European Oak
Plywood Source	Central European
Construction	Rustic = Eucalyptus Plywood
Style	Plank
Jointing System	Tongue & Groove all 4 edges
Plank Edge Profile	Standard 2 way
Blocks Edge Profile	4-sided Bevelled Edge

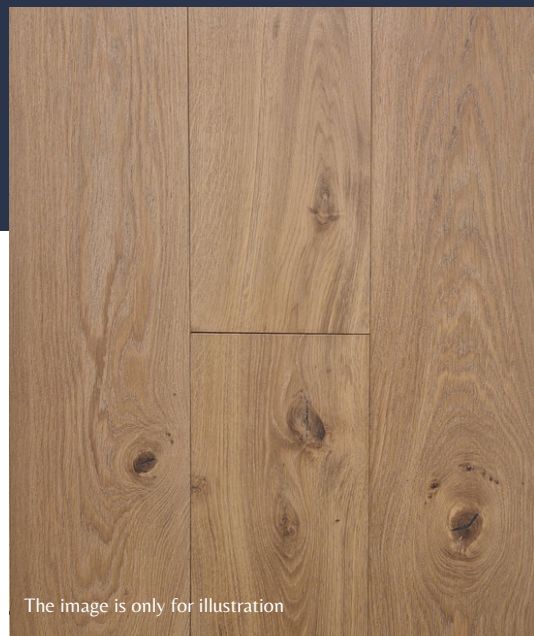

The image is only for illustration

DIMENSIONS

Plank Widths	190mm
Thickness	16/4mm or 14/3mm
Plank Length	1.9m with nested halves

GRADING

Rustic

Knot content: Unlimited healthy knots allowed, filled cracked knots allowed. Filled dead knots up to 40mm. Unlimited total knots allowed.

Other traits: Limited small bark pockets allowed, splits up to 5mm in width and length of which doesn't exceed the width of the plank allowed, limited to 20% total volume, no worm holes allowed.

Sap content: Edge sap allowed limited to 30% of the width of the board. Limited core sap to 15% of total volume.

Colour: Natural variation allowed, small amounts of dark heart wood allowed.

TECHNICAL

Moisture Content: Between 8-11%
 Slip Rating: Low Risk Dry, High Risk Wet
 Fire Rating: Cfl - S1
 Janka Hardness Rating: 1,120 lbf (4980N)
 Humidity requirements: Between 40 & 60% relative humidity
 Thermal conductivity: $\lambda=0,17$ W/mK
 Formaldehyde Emission: E1
 Maintenance: JSW Kit

OFFERING 2 DIFFERENT FORMATS OF FLOORING

QUICK SUMMARY

- Bespoke European Engineered Oak
- Rustic Grade only
- 16/4mm or 14/3mm
- Planks width 190mm & length 1.9m
- Suitable for underfloor heating
- Glued is preferred installation
Planks can be floated
- Flooring accessories available to compliment the floor
- Matching Stair Treads & Risers available



The image is only for illustration



Plank 190mm

The image is only for illustration



Plank 190mm

Contract Collection

The image is only for illustration



Plank 190mm

AVAILABLE IN THE BELOW OPTIONS

Plank
190 x 16/4mm Rustic or 190 x 16/14/3mm Rustic

**TO ENQUIRE PLEASE QUOTE
CODE "CONTRACT"**

