


CORE

DATA SHEET

GENERAL DETAILS

Colour Code	xxxxxxx
Product Range	Core
Oak Type	European Oak
Plywood Source	Central European
Construction	Rustic = Eucalyptus Plywood Select = Birch Plywood
Style	Plank, Herringbone, Chevron, Mansion Weave
Jointing System	Tongue & Groove all 4 edges
Plank Edge Profile	Standard 2 way
Blocks Edge Profile	4-sided Bevelled Edge

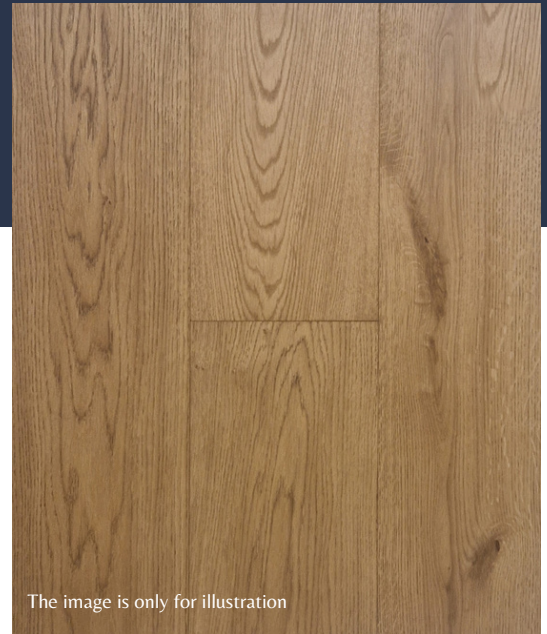

The image is only for illustration

DIMENSIONS

Plank Widths	190mm, 220mm, 300mm
Herringbone	600 x 120mm & 350 x 70mm
Tumbled Herringbone	350 x 70mm
Chevron	600 x 120mm
Mansion Weave	284 x 190mm Polygons & 284 x 67mm Trapezoids
Thickness	16/4mm or 20/4mm (300mm only)
Plank Length	1.9m with nested splits 300mm 3m lengths

GRADING

Rustic

Knot content: Unlimited healthy knots allowed, filled cracked knots allowed. Filled dead knots up to 40mm. Unlimited total knots allowed.

Other traits: Limited small bark pockets allowed, splits up to 5mm in width and length of which doesn't exceed the width of the plank allowed, limited to 20% total volume, no worm holes allowed.

Sap content: Edge sap allowed limited to 30% of the width of the board. Limited core sap to 15% of total volume.

Colour: Natural variation allowed, small amounts of dark heart wood allowed.

Select

Knot content: Live knots up to 15mm diameter allowed, limited to 2-4 knots per board. Dead knots up to 5mm allowed, limited to 1-2 knots per board. Pin knots allowed.

Other traits: No bark pockets, splits or worm holes allowed.

Sap content: No edge sap allowed, limited core sap to 5% total volume.

Colour: Natural variation allowed, no dark heart wood allowed.

TECHNICAL

Moisture Content: Between 8-11%
Slip Rating: Low Risk Dry, High Risk Wet

Fire Rating: Cfl - S1

Janka Hardness Rating: 1,120 lbf (4980N)

Humidity requirements: Between 40 & 60% relative humidity

Thermal conductivity: $\lambda=0,17$ W/mK

Formaldehyde Emission: E1

Maintenance: JSW Kit

OFFERING 10 DIFFERENT FORMATS OF FLOORING

QUICK SUMMARY

- Bespoke European Engineered Oak
- Rustic or Select
- 16/4mm or 20/4mm (300mm only)
- Planks length 1.9m
- Suitable for underfloor heating
- Glued is preferred installation
Planks can be floated
- Flooring accessories available to compliment the floor
- Matching Stair Treads & Risers available



INT-COC-005535 395 (FSC100%)

The image is only for illustration



Plank

The image is only for illustration



Mansion Weave

Core Collection

The image is only for illustration



Herringbone

AVAILABLE IN THE BELOW OPTIONS

Plank

190 x 16/4mm Rustic, 220 x 16/4mm Rustic or Select
300mm x 20/4mm Select

Herringbone

600 x 120mm x 16/4mm Rustic or Select
350 x 70 x 16/4mm Select

Tumbled Herringbone

350 x 70 x 16/4mm Rustic

Chevron

600 x 120mm x 16/4mm Select

Mansion Weave

284 x 190mm Polygons & 284 x 67mm Trapezoids
16/4mm Select

**TO ENQUIRE PLEASE QUOTE
CODE "CORE"**

